




Kelvin

2700K – warm white, similar to incandescent bulb
3000K – soft white, similar to halogen bulb
4000K – bright white, similar to fluorescent lighting
5000K – daylight, very bright & similar to sunlight
6000K – cool white, blue tinted, like a monitor

Beam Angle



This focused lighting solution is crafted from robust die-cast aluminum with a protective, high-quality finish, ensuring long term durability and resistance to typical indoor wear. Designed for recessed ceiling installation, it combines a sleek, discreet aesthetic with powerful, energy-efficient LED illumination, enhancing indoor spaces with both elegance and reliable performance.

LED CHIP




LED DRIVER




Description

Housing - Die Cast Aluminum, Highly pure powder coating
Diffuser - Optical PMMA Lens
Reflector - Aluminum Reflector
Color Available - White, Black, Silver & Grey
Lifespan - >50,000 Hours (L80 B10)
Voltage - AC220~240V
Working Temperature - -30C° ~ +65C°
IP Rating - 54


Item Code	Power	Lamp	Lumen	Dimensions
LP-DL918408	08W	LED	960lm	A84 X B34 mm
LP-DL918415	15W	LED	1800lm	A105 X B42 mm
LP-DL918420	20W	LED	2400lm	A136 X B50 mm
LP-DL918430	30W	LED	3600lm	A162 X B58 mm
LP-DL918440	40W	LED	4800lm	A213 X B66 mm

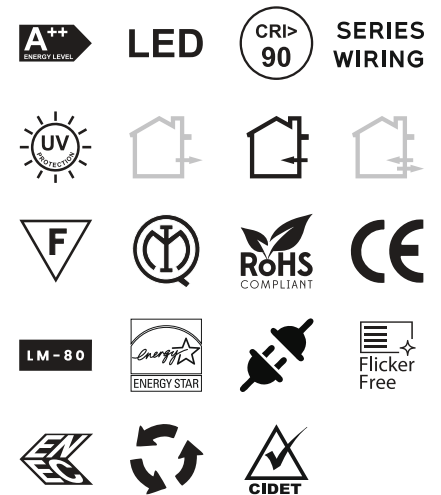

Photometrics

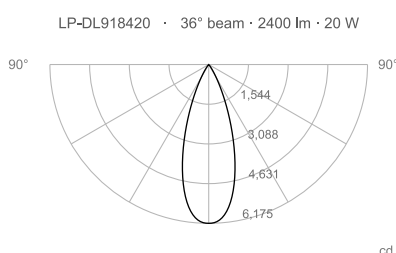

Technical Drawing



This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk