



LED street luminaire optimized for low maintenance. The sealed light engine resists contamination, reducing lumen depreciation from dirt. Smart-ready sockets and drivers support future controls without redesign.

Description

Housing - Die Cast Aluminum

Diffuser - Opal PC

Color Available - Grey

Lifespan - >50,000 Hours (L70 B10)

Voltage - AC220~240V

Working Temperature - -20° ~ +65°C

IP Rating - 65

IK - 10

Item Code	Power	Lamp	Lumen	Dimensions
LP-STR317730	30W	LED	2087lm	AØ365 X B122 mm
LP-STR317745	45W	LED	3089lm	AØ365 X B122 mm

OUTDOOR LIGHTS KENSINGTON

DECORATIVE POLE

Kelvin

2700K - warm white, similar to incandescent bulb

3000K - soft white, similar to halogen bulb

4000K - bright white, similar to fluorescent lighting

5000K - daylight, very bright & similar to sunlight

6000K - cool white, blue tinted, like a monitor

Beam Angle



LED CHIP



LED DRIVER



This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk





Kelvin

2700K - warm white, similar to incandescent bulb


3000K - soft white, similar to halogen bulb

4000K - bright white, similar to fluorescent lighting


5000K - daylight, very bright & similar to sunlight

6000K - cool white, blue tinted, like a monitor

Technical Drawing

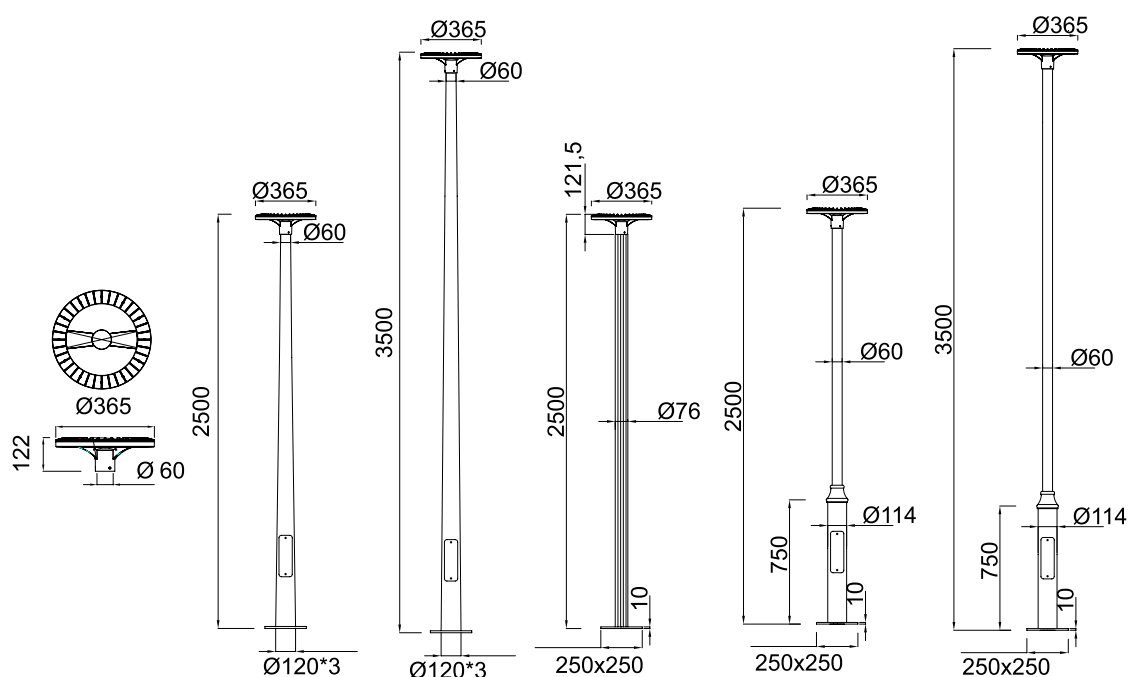


Photometrics



	H(m)	Eavg(lx)	Emax(lx)	D(m)
1	138.7	587.4	3.60	
2	34.7	146.8	7.20	
3	15.4	65.3	10.80	
4	8.7	36.7	14.41	
5	5.5	23.5	18.01	

MTC LED 30W 2087lm
Opal PC
120°
Class I, IP65



	H(m)	Eavg(lx)	Emax(lx)	D(m)
1	204.9	869.2	3.60	
2	51.2	217.3	7.20	
3	22.8	96.6	10.80	
4	12.8	54.3	14.41	
5	8.2	34.8	18.01	

Lumileds LED 45W 3089lm
Opal PC
120°
Class I, IP65