


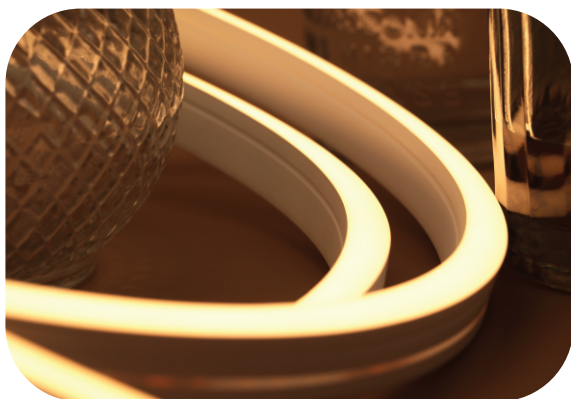

IP68 flexible dot free linear LED light line with a 16 mm x 16 mm (W x H) cross section. UV resistance, chemical stability against urban gases and protection against abrasion. Vertical bending only, excellent solution for indoor/outdoor organic facade accent lighting or decorative applications requiring IP68 ingress.

Description

Housing - Anti-yellowing & Heat Resisting Silicone Glue Extrusion
Chemical Resistance Acid

Diffuser - Milky White Silicone

Reflector - Aluminium Reflector

Color Available - Milky

Lifespan - >50,000 Hours (L80 B10)

Voltage - 24V DC


Working Temperature - -20C° ~ +60C°

IP Rating - 68


IK - 08

Item Code	Power	Lamp	Lumen	Dimensions
LP-SRLV4.8	4.8 W/M	LED	528lm/m	16 X 16mm
LP-SRLV9.6	9.6 W/M	LED	1056lm/m	16 X 16mm
LP-SRLV12	12 W/M	LED	1320lm/m	16 X 16mm
LP-SRLV14	14 W/M	LED	1540lm/m	16 X 16mm

Photometrics



Technical Drawing



INDOOR LIGHTS FLEXY

STRIP LIGHTS

Kelvin

2700K - warm white, similar to incandescent bulb

3000K - soft white, similar to halogen bulb

4000K - bright white, similar to fluorescent lighting

5000K - daylight, very bright & similar to sunlight

6000K - cool white, blue tinted, like a monitor

RGB - color changing LEDs, millions of colors

RGBW - RGB + white LED, pure white & better colors

Beam Angle



LED CHIP



LED DRIVER



This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk