


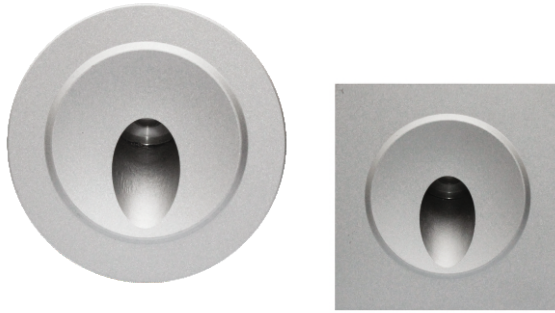


OUTDOOR LIGHTS **BAM**

WALL RECESSED LIGHT

Kelvin

2700K – warm white, similar to incandescent bulb
3000K – soft white, similar to halogen bulb
4000K – bright white, similar to fluorescent lighting
5000K – daylight, very bright & similar to sunlight
6000K – cool white, blue tinted, like a monitor

Beam Angle



Bam LED wall step light with easy installation, this light adopts die-cast aluminum body. This wall step ideal Applications that require continuous stairway, lobby, reception, corridors, etc. Light good to provide high bright lighting to stairway, lobby, reception, corridors etc.

LED CHIP



LED DRIVER



Description

Housing - Die-Casting Aluminum with Powder Coating
Diffuser - Optical Lens, Molding Shape Silicon Seal
Reflector - Aluminium Reflector

Color Available - Gray

Lifespan - >50,000 Hours (L90 B10)


Voltage - AC220~240V

Working Temperature - -20C° ~ +55C°


IP Rating - 65

IK - 08


Item Code	Power	Lamp	Lumen	Dimensions
LP-STL358001	01W	LED	120lm	A80 X B57 X C47.5mm
LP-STL358002	02W	LED	240lm	A80 X B57 X C47.5mm

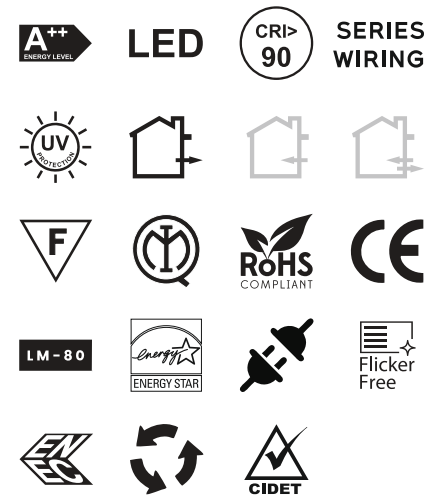

Photometrics



Technical Drawing



This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk