




Kelvin

- 2700K – warm white, similar to incandescent bulb
- 3000K – soft white, similar to halogen bulb
- 4000K – bright white, similar to fluorescent lighting
- 5000K – daylight, very bright & similar to sunlight
- 6500K – cool white, blue tinted, like a monitor

Beam Angle



LED CHIP



LED DRIVER



This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk




Bette LED Spotlight is a mini and exquisite lamp with high light transmittance PMMA lens. It offers a very little size in many design styles, without forgetting about the functionality: all the range is characterized by the use high quality LED technology, so the result is a choice of accent light suitable for false ceiling, kitchen cabinet and not only. The possible applications are a multitude. The mini spotlights are all environmental friendly and very useful in a matter of energy and economical saving. The light result is bright, uniform and comfortable. Housing made by die cast aluminum powder coated with choice of RAL colors reflector with pure die cast aluminum diffuser tempered glass.

Description

- Housing** - Hard Die-cast Aluminum
- Diffuser** - Tempered Frosted Glass or Clear Tempered Glass
- Reflector** - Aluminum Reflector
- Color Available** - White
- Lifespan** - >50,000 Hours (L90 B10)
- Voltage** - AC100~240V
- Working Temperature** - -10C° ~ +55C°
- UGR** - <19
- IP Rating** - 44
- IK** - 06

Item Code	Power	Lamp	Lumen	Dimensions
LP-SL181502	02W	LED	240lm	A40 X B36 X C35mm
LP-SL181503	03W	LED	360lm	A40 X B36 X C35mm
LP-SL181505	05W	LED	600lm	A50 X B44 X C45mm

Photometrics

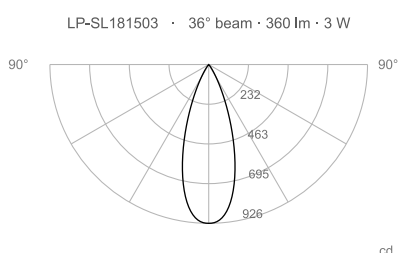

Technical Drawing

