



OUTDOOR LIGHTS BRIGTON

DECORATIVE POLE

Kelvin

- 2700K – warm white, similar to incandescent bulb
- 3000K – soft white, similar to halogen bulb
- 4000K – bright white, similar to fluorescent lighting
- 5000K – daylight, very bright & similar to sunlight
- 6000K – cool white, blue tinted, like a monitor

Beam Angle



A versatile street luminaire that balances cost, output, and longevity. Precision lenses shape the beam for local streets, collectors, and pathways. Tool-free latching and a hinged gear tray make servicing straightforward.

LED CHIP



LED DRIVER



Description

Housing - Die Cast Aluminum, Extruded Aluminum Pole

Diffuser - Clear PC

Color Available - Black

Lifespan - >50,000 Hours (L70 B10)

Voltage - AC220~240V

Working Temperature - -20° ~ +65°C

IP Rating - 65

IK - 10

Item Code	Power	Lamp	Lumen	Dimensions
LP-STR318215	15W	LED	990lm	AØ180 mm
LP-STR318230	30W	LED	2344lm	A250 * B250 mm
LP-STR318250	50W	LED	3981lm	A250 * B250 mm



This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk







Kelvin

- 2700K – warm white, similar to incandescent bulb
- 3000K – soft white, similar to halogen bulb
- 4000K – bright white, similar to fluorescent lighting
- 5000K – daylight, very bright & similar to sunlight
- 6000K – cool white, blue tinted, like a monitor


Technical Drawing

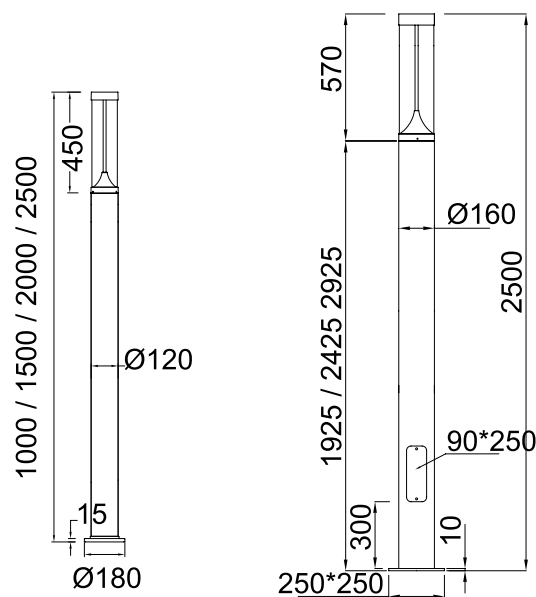


Photometrics

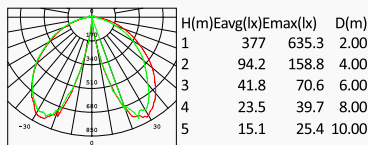

Lumileds 30W 2344lm
Clear PC
90°
Class I, IP65

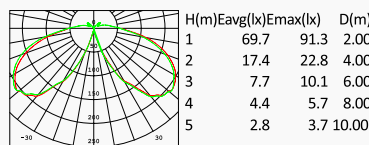

Lumileds 15W 990lm
Clear PC
90°
Class I, IP65

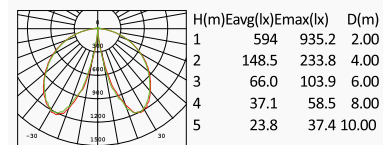

Lumileds 50W 3981lm
Clear PC
90°
Class I, IP65