



OUTDOOR LIGHTS CARLISLE

DECORATIVE POLE

Kelvin

2700K – warm white, similar to incandescent bulb
 3000K – soft white, similar to halogen bulb
 4000K – bright white, similar to fluorescent lighting
 5000K – daylight, very bright & similar to sunlight
 6000K – cool white, blue tinted, like a monitor

Beam Angle



A roadway fixture focused on visual comfort and uniformity. The flat glass and internal baffles reduce high-angle brightness, improving night-time visibility. Pre-wired terminal blocks and captive screws speed up installation.

LED CHIP




LED DRIVER



Description

Housing - Die Cast Aluminum
Diffuser - Opal PC
Color Available - Black & Grey
Lifespan - >50,000 Hours (L70 B10)
Voltage - AC220~240V
Working Temperature - -20° ~ +65°C
IP Rating - 65
IK - 10

Item Code	Power	Lamp	Lumen	Dimensions
LP-STR318760	60W	LED	3307lm	A670 X B670 X C695 mm

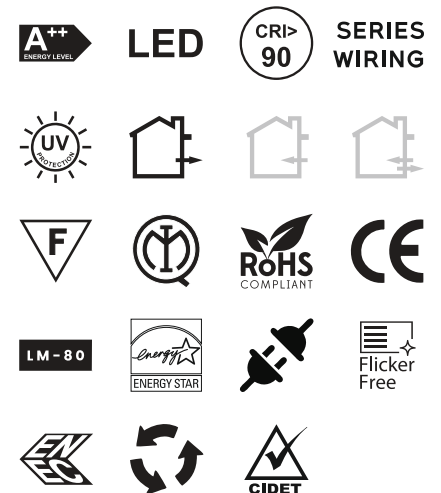

This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk



Kelvin

2700K – warm white, similar to incandescent bulb


3000K – soft white, similar to halogen bulb

4000K – bright white, similar to fluorescent lighting


5000K – daylight, very bright & similar to sunlight

6000K – cool white, blue tinted, like a monitor

Technical Drawing

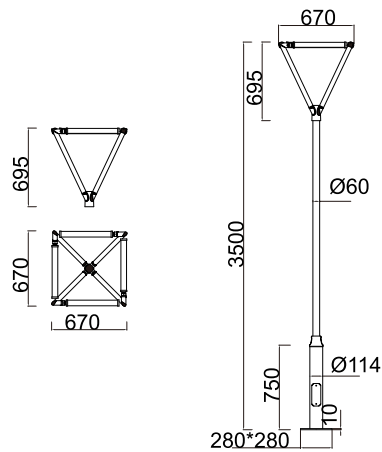

Photometrics

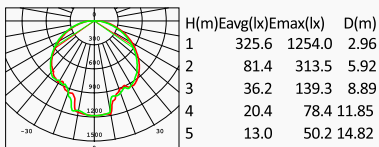

MTC 2835 LED 60W 3307lm
Opal PC
120°
Class I, IP65