



OUTDOOR LIGHTS CASCADE

WALL SURFACE LIGHT

Kelvin

2700K – warm white, similar to incandescent bulb
 3000K – soft white, similar to halogen bulb
 4000K – bright white, similar to fluorescent lighting
 5000K – daylight, very bright & similar to sunlight
 6000K – cool white, blue tinted, like a monitor

Beam Angle



Cascade LED slim wall packs deliver full cutout or semi cutout light distribution. The innovative pivoting head design aims the light precisely. Suitable for applications including pathways, perimeter lighting and building entryways. This LED wall pack fixtures can be mounted on surface/facade, whether you have a new construction or upgrade application.

LED CHIP




LED DRIVER




Description

Housing - Powder Coated Die cast Aluminum
Diffuser - Tempered Glass Diffuser
Reflector - Aluminium Reflector
Color Available - White & Black
Lifespan - >50,000 Hours (L80 B10 F10)
Voltage - AC220~240V
Working Temperature - -20C° ~ +60C°
IP Rating - 65
IK - 10
UGR < 20


Item Code	Power	Lamp	Lumen	Dimensions
LP-ODL377245	45W	LED	5400lm	A138 X B240 X C211mm

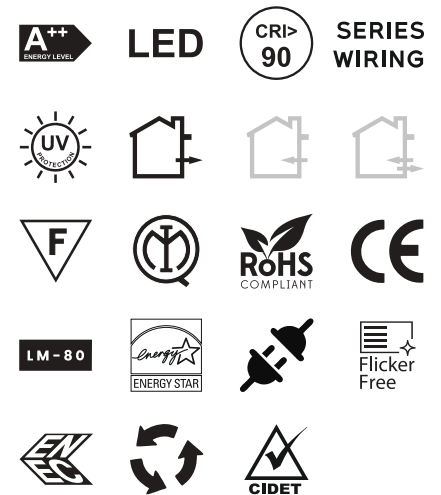

Photometrics



Technical Drawing

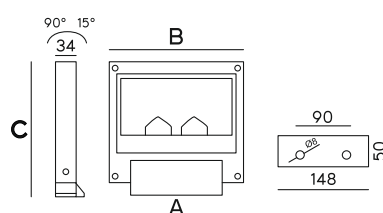

This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk