



OUTDOOR LIGHTS CHESTER

DECORATIVE POLE

Kelvin

2700K – warm white, similar to incandescent bulb

3000K – soft white, similar to halogen bulb

4000K – bright white, similar to fluorescent lighting

5000K – daylight, very bright & similar to sunlight

6000K – cool white, blue tinted, like a monitor


Beam Angle



LED CHIP



LED DRIVER

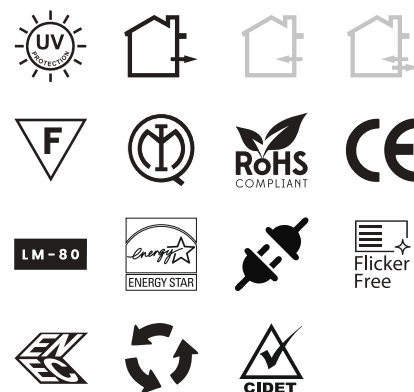

This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk



Chester LED Street light with a quiet, modern form. The sealed module achieves consistent performance in dusty or humid environments. Dimming options and controls support energy savings during low-traffic periods.

Description

Housing - Stainless Steel and Extruded Aluminum Body

Diffuser - Opal PMMA

Color Available - Black & Grey

Lifespan - >50,000 Hours (L70 B10)

Voltage - AC220~240V

Working Temperature - -20° ~ +65°C

IP Rating - 65

IK - 10

Item Code	Power	Lamp	Lumen	Dimensions
LP-STR319930	30W	LED	3300lm	A200 X B200 X C1000mm
				A200 X B200 X C1500mm
				A200 X B200 X C2000mm
				A200 X B200 X C2500mm
				A200 X B200 X C4000mm
LP-STR319940	40W	LED	4400lm	A200 X B200 X C1000mm
				A200 X B200 X C1500mm
				A200 X B200 X C2000mm
				A200 X B200 X C2500mm
				A200 X B200 X C4000mm
LP-STR319960	60W	LED	6600lm	A250 X B250 X C2500mm
				A250 X B250 X C3000mm
				A250 X B250 X C3500mm
				A250 X B250 X C4000mm



OUTDOOR LIGHTS CHESTER

DECORATIVE POLE



Kelvin

2700K - warm white, similar to incandescent bulb


3000K – soft white, similar to halogen bulb

4000K - bright white, similar to fluorescent lighting


5000K – daylight, very bright & similar to sunlight

6000K - cool white, blue tinted, like a monitor


Technical Drawing

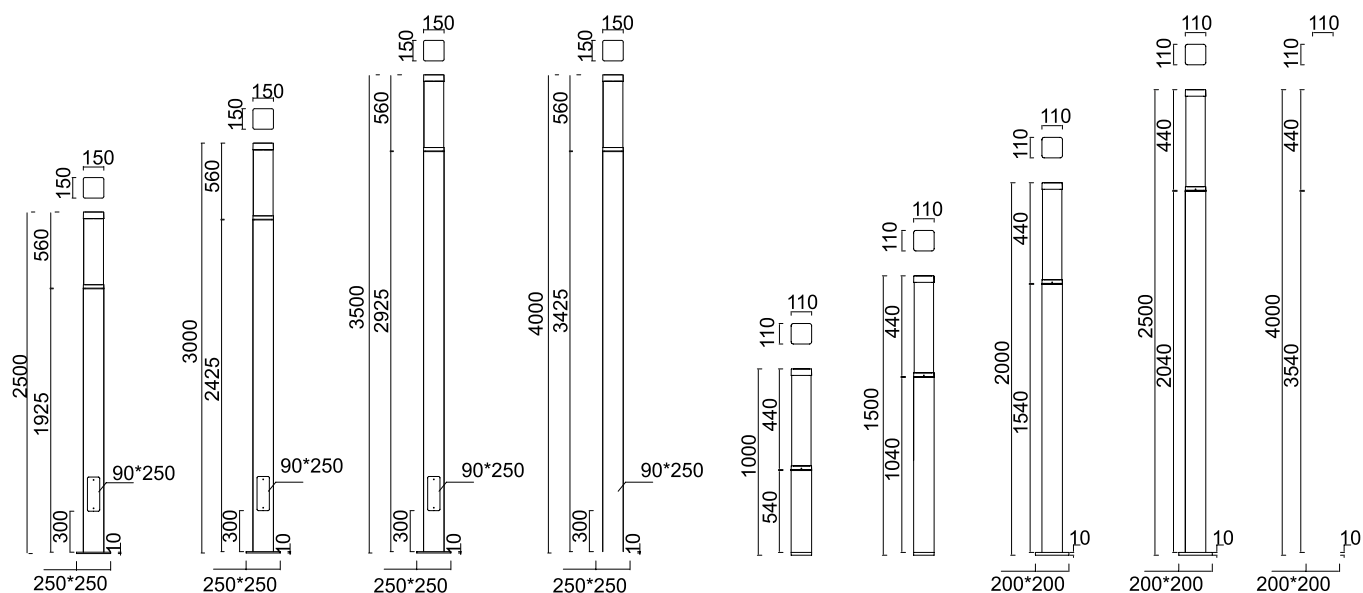

Photometrics

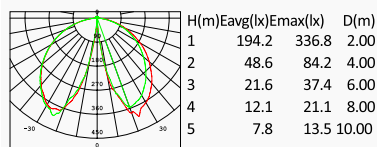

Lumileds 3030 LED 1234lm
Clear PMMA
100°
Class I, IP65

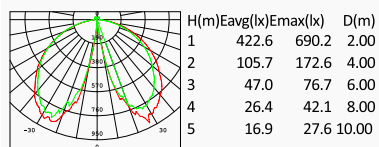

Lumileds 3030 LED 2807lm
Clear PMMA
100°
Class I, IP65