




OUTDOOR LIGHTS CLEAR

WALL RECESSED LIGHT

Kelvin

- 2700K – warm white, similar to incandescent bulb
- 3000K – soft white, similar to halogen bulb
- 4000K – bright white, similar to fluorescent lighting
- 5000K – daylight, very bright & similar to sunlight
- 6000K – cool white, blue tinted, like a monitor

Beam Angle



Clear step light for outdoor installation in the wall, phosphor-chromatised and polyester powder coated die-cast aluminium body, stainless steel 316 frame, tempered frosted glass diffuser, polypropylene housing for recess, moulded silicone gasket and stainless steel screws. Built-in LED driver 220-240V 50-60Hz, with IP65 rating.

LED CHIP




LED DRIVER




Description

- Housing** - Die-Casting Aluminum
- Diffuser** - Clear / Frosted Glass
- Reflector** - Aluminium Reflector
- Color Available** - White, Black & Dark-Gray
- Lifespan** - >50,000 Hours (L90 B10)
- Voltage** - AC220~240V
- Working Temperature** - -20C° ~ +55C°
- IP Rating** - 65
- IK** - 08


Item Code	Power	Lamp	Lumen	Dimensions
LP-STL357508	08W	LED	800lm	A195 X B155 X C63mm

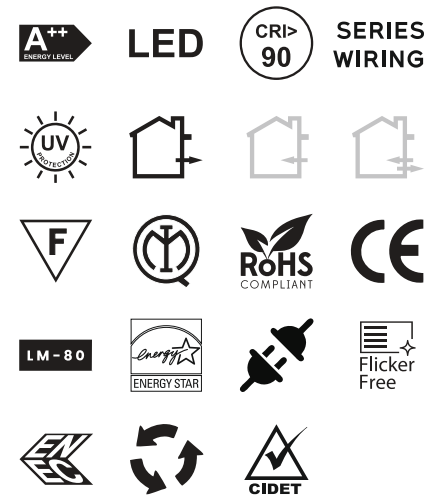

Photometrics



Technical Drawing



This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk