



This pendant offers another option for contemporary indoor lighting solutions. Surrounded by a cylindrical metal structure, with durable white/silver/black powder coat finish, PMMA diffuser, offering a comfortable diffused light, High transmission opal diffuser, Suspension installation.


Description

Housing - Metal Powder Coated Finish
Diffuser - PMMA
Reflector - Aluminium Reflector
Color Available - White, Dark-Gray, Black
Lifespan - >50,000 Hours (L80 B10)
Voltage - AC200~240V
Working Temperature - -30C° ~ +65C°
UGR - <19
IP Rating - 65
IK - 10

Item Code	Power	Lamp	Lumen	Dimensions
LP-CL244108	08W	LED	1120lm	ASSX B100mm
LP-CL244110	10W	LED	1400lm	A75 X B130mm
LP-CL244115	15W	LED	2100lm	A94 X B150mm
LP-CL244120	20W	LED	2800lm	A115 X B160mm

Photometrics

Technical Drawing




INDOOR LIGHTS CYLINDRO

PENDANT LIGHT

Kelvin

2700K - warm white, similar to incandescent bulb
 3000K - soft white, similar to halogen bulb
 4000K - bright white, similar to fluorescent lighting
 5000K - daylight, very bright & similar to sunlight
 6000K - cool white, blue tinted, like a monitor


Beam Angle



LED CHIP



LED DRIVER

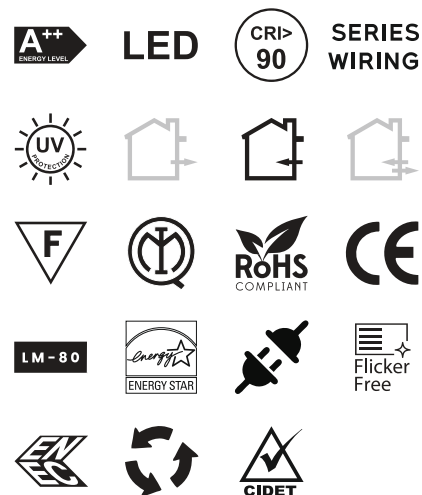

This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk