



Dover LED Street light with a quiet, modern form. The sealed module achieves consistent performance in dusty or humid environments. Dimming options and controls support energy savings during low-traffic periods.

Description

Housing - Extruded Aluminum Pole

Diffuser - Opal PC

Color Available - Black & Grey

Lifespan - >50,000 Hours (L70 B10)

Voltage - AC220~240V

Working Temperature - -20° ~ +65°C

IP Rating - 65

IK - 10

Item Code	Power	Lamp	Lumen	Dimensions
LP-STR319030	30W	LED	2717lm	A1900 X B100 X C150 mm
LP-STR319040	40W	LED	3530lm	A1900 X B100 X C150 mm
LP-STR319060	60W	LED	3837lm	A1900 X B100 X C150 mm

OUTDOOR LIGHTS DOVER

DECORATIVE POLE

Kelvin

2700K - warm white, similar to incandescent bulb

3000K - soft white, similar to halogen bulb

4000K - bright white, similar to fluorescent lighting

5000K - daylight, very bright & similar to sunlight

6000K - cool white, blue tinted, like a monitor

Beam Angle



LED CHIP



LED DRIVER



This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk





Kelvin

2700K – warm white, similar to incandescent bulb


3000K – soft white, similar to halogen bulb

4000K – bright white, similar to fluorescent lighting


5000K – daylight, very bright & similar to sunlight

6000K – cool white, blue tinted, like a monitor

Technical Drawing

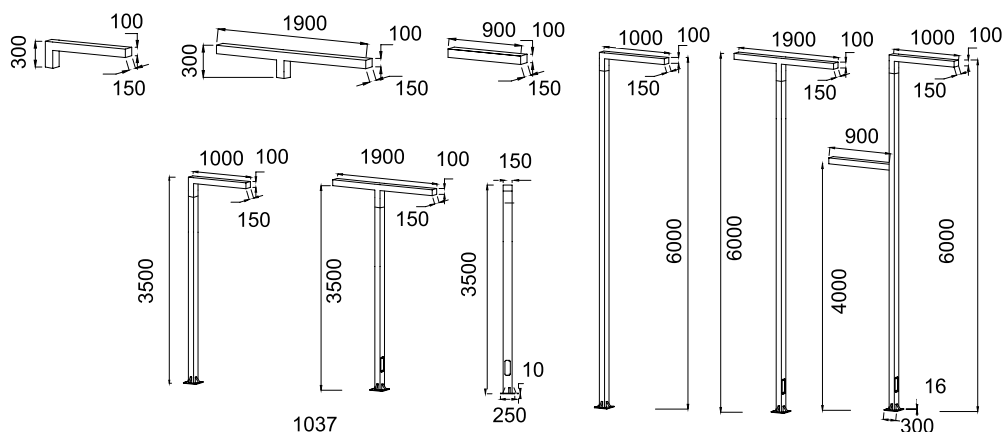


Photometrics




H(m)	Eavg(lx)	Emax(lx)	D(m)
1	288.9	971.3	2.89
2	72.2	242.8	5.78
3	32.1	107.9	8.67
4	18.1	60.7	11.57
5	11.6	38.9	14.46

Lumileds LED 30W 2717lm
Opal PC C
110°
Class I, IP65



H(m)	Eavg(lx)	Emax(lx)	D(m)
1	304	1163.0	3.28
2	76.1	290.6	6.56
3	33.8	129.2	9.84
4	19.0	72.7	13.13
5	12.2	46.5	16.41

Lumileds LED 40W 3530lm
Opal PC
110°
Class I, IP65



H(m)	Eavg(lx)	Emax(lx)	D(m)
1	425	1393.0	2.86
2	106.3	348.3	5.72
3	47.2	154.8	8.59
4	26.6	87.1	11.45
5	17.0	55.7	14.31

Lumileds LED 60W 3837lm
Opal PC
110°
Class I, IP65