



Kelvin

- 2700K – warm white, similar to incandescent bulb
- 3000K – soft white, similar to halogen bulb
- 4000K – bright white, similar to fluorescent lighting
- 5000K – daylight, very bright & similar to sunlight
- 6000K – cool white, blue tinted, like a monitor

Beam Angle



Ely LED Street light with a quiet, modern form. The sealed module achieves consistent performance in dusty or humid environments. Dimming options and controls support energy savings during low-traffic periods.

LED CHIP



LED DRIVER





Description

- Housing - Extruded Aluminum Body
- Diffuser - Opal PC
- Color Available - Black & Grey
- Lifespan - >50,000 Hours (L70 B10)
- Voltage - AC220-240V
- Working Temperature - -20° ~ +65°C
- IP Rating - 65
- IK - 10

Item Code	Power	Lamp	Lumen	Dimensions
LP-STR321111	11W	LED	1265lm	A250 X B250 X C1600mm
LP-STR321116	16W	LED	1840lm	A250 X B250 X C2300mm
LP-STR321120	20W	LED	2300lm	A250 X B250 X C2500mm
LP-STR321130	30W	LED	3450lm	A250 X B250 X C3000mm
LP-STR321140	40W	LED	4600lm	A250 X B250 X C3500mm

Technical Drawing

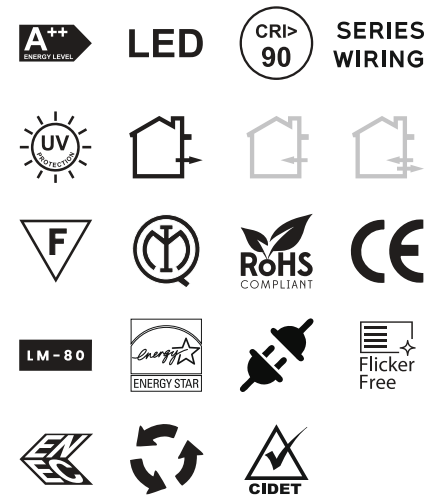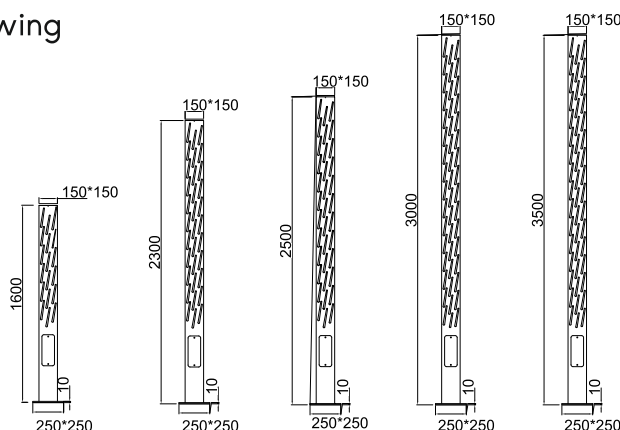

This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!

