



This LED bollard delivers comfortable pathway lighting with restrained glare and clean cut-off. The sealed optic and weather-rated gaskets keep moisture and dust out. Offered with symmetric or forward-throw distributions to keep light where it is needed. Root or surface mounting options simplify installation on new builds or refurbishment.

Description

Housing - Die-Cast Aluminum and Extruded Aluminum Pole

Diffuser - Clear PC

Color Available - Black

Lifespan - >50,000 Hours (L90 B10)

Voltage - AC220-240V


Working Temperature - -20C° ~ +65C°

IP Rating - 65


IK - 09

Item Code	Power	Lamp	Lumen	Dimensions
LP-BL334806	06W	LED	600lm	AØ140 X B400 mm AØ140 X B650 mm AØ140 X B800 mm
LP-BL334808	08W	LED	800lm	AØ140 X B400 mm AØ140 X B650 mm AØ140 X B800 mm
LP-BL334810	10W	LED	1000lm	AØ140 X B400 mm AØ140 X B650 mm AØ140 X B800 mm

Photometrics



Technical Drawing



OUTDOOR LIGHTS GROVE

BOLLARD LIGHT

Kelvin

2700K - warm white, similar to incandescent bulb

3000K - soft white, similar to halogen bulb

4000K - bright white, similar to fluorescent lighting

5000K - daylight, very bright & similar to sunlight

6000K - cool white, blue tinted, like a monitor


Beam Angle



LED CHIP



LED DRIVER

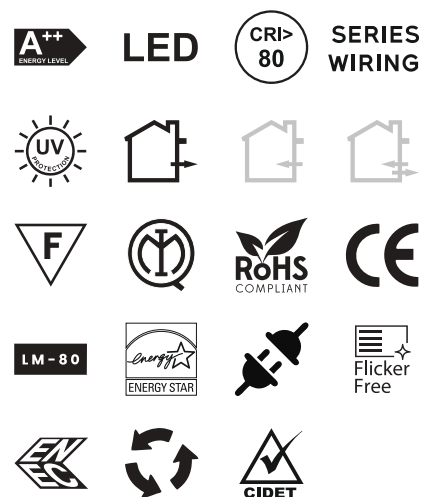

This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk