



Kelvin

- 2700K – warm white, similar to incandescent bulb
- 3000K – soft white, similar to halogen bulb
- 4000K – bright white, similar to fluorescent lighting
- 5000K – daylight, very bright & similar to sunlight
- 6500K – cool white, blue tinted, like a monitor

Beam Angle



This focused lighting solution is crafted from robust die-cast aluminum with a protective, high-quality finish, ensuring long term durability and resistance to typical indoor wear. Designed for recessed ceiling installation, it combines a sleek, discreet aesthetic with powerful, energy-efficient LED illumination, enhancing indoor spaces with both elegance and reliable performance.


Description

- Housing** - Aluminum Body
- Color Available** - White & Black
- Lifespan** - Depends on Lamp/Module Used
- Voltage** - Depends on Lamp/Module Used
- Working Temperature** - Depends on Lamp/Module Used
- IP Rating** - IP 20

LED CHIP




LED DRIVER

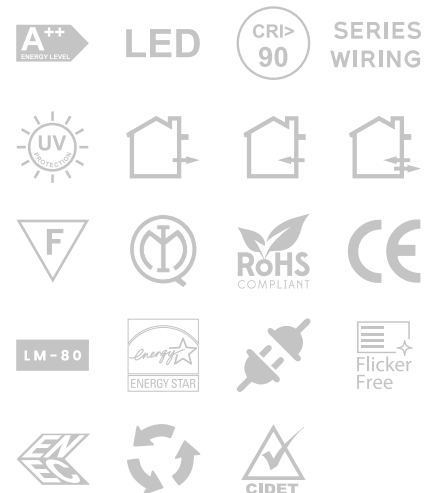

Item Code	Power	Lamp	Lumen	Dimensions
LP-SL184200	GU10 / MR16	LED	-----	A86 x B39mm

Photometrics

Technical Drawing



This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk