



Leggera oval shape provides perfect visual conditions in areas around buildings for attractively displayed facades and entrance areas. It is made in die cast aluminium with PC opal diffuser covered with aluminium grid and the covers provide high design flexibility. Luminous flux and light colour can also be flexibly modified retroactively. It can be installed both vertically, producing special effects on the walls.


Description

- Housing** - Die-cast Aluminum
- Diffuser** - Clear or Frosted Diffuser
- Reflector** - Aluminium Reflector
- Color Available** - Black and Gray
- Lifespan** - >50,000 Hours (L90 B10)
- Voltage** - AC220~240V
- Working Temperature** - -30C° ~ +55C°
- IP Rating** - 44

Item Code	Power	Lamp	Lumen	Dimensions
LP-ODL376008	08W	LED	960lm	A350XB120XC120mm
LP-ODL376010	10W	LED	1200lm	A350XB120XC120mm
LP-ODL376012	12W	LED	1400lm	A350XB120XC120mm

Photometrics

Technical Drawing



OUTDOOR LIGHTS LAGGERA

WALL SURFACE LIGHT

Kelvin

- 2700K - warm white, similar to incandescent bulb
- 3000K - soft white, similar to halogen bulb
- 4000K - bright white, similar to fluorescent lighting
- 5000K - daylight, very bright & similar to sunlight
- 6000K - cool white, blue tinted, like a monitor


Beam Angle



LED CHIP



LED DRIVER

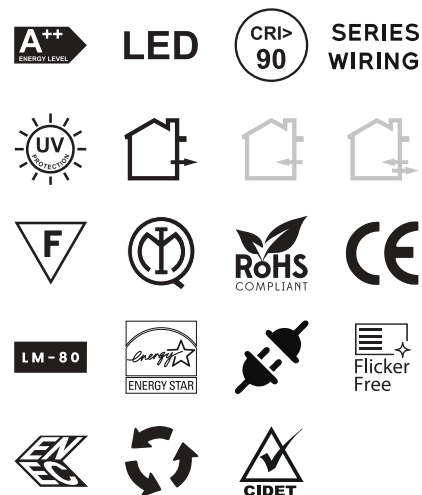

This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk