




Kelvin

- 2700K – warm white, similar to incandescent bulb
- 3000K – soft white, similar to halogen bulb
- 4000K – bright white, similar to fluorescent lighting
- 5000K – daylight, very bright & similar to sunlight
- 6000K – cool white, blue tinted, like a monitor

Beam Angle



Lexo LED Down Light for indoor or outdoor mounting, powerful lumen output via the powerful recessed LED chip. Driver surface-mounted with quick junction box with quick clips for additional looping. Made of die-cast powder-coated aluminium, glass diffuser. Lexo down light is unique designed with reflector and COB high power LED chip. ADC12 aluminum housing provides excellent thermal dissipation. LED Module design could save SKU and offer an easy module replacement. It supports a great compatibility for non-dim, triac dim, 0-10V, DALI dim with worldwide dimmers.

Description

Housing - Luminaire Body of Die-cast Aluminum, White, Powder-coated

Diffuser - Tempered Frosted or Clear Tempered Glass

Reflector - Aluminium Reflector

Color Available - White

Lifespan - >50,000 Hours (L90 B10)

Voltage - AC220~240V

Working Temperature - -10C° ~ +50C°

IP Rating - 54

LED CHIP



LED DRIVER



This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.


If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk

Item Code	Power	Lamp	Lumen	Dimensions
LP-DL179510	10W	LED	1200lm	A110 x B53 x C90mm
LP-DL179513	13W	LED	1560lm	A110 x B53 x C90mm
LP-DL179518	18W	LED	2160lm	A145 x B65 x C120mm
LP-DL179525	25W	LED	3000lm	A190 x B75 x C160mm
LP-DL179535	35W	LED	4200lm	A190 x B75 x C160mm
LP-DL179545	45W	LED	5400lm	A225 x B87 x C200mm

Photometrics

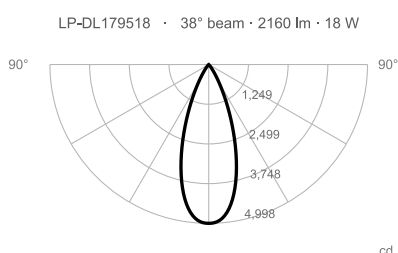

Technical Drawing

