



The primary appeal of LED street lighting is energy efficiency compared to conventional street lighting fixture technologies such as high pressure sodium (HPS) and metal halide (MH). Environmentally friendly alternative to traditional lightning. Resistant to ambient temperatures up to 20° c to +55°C. High Power LEDs.

Description

Housing - Die Cast Aluminum Body, Aluminum Extruded Column

Diffuser - External Di user & External Screwed Made of UV-stabilized, Transparent Polycarbonate

Reflector - Aluminum Reflector

Color Available - Powder Paint Coating with RAL Color. Black Matt: RAL 9005, Dark Gray: RAL7011, UV Resistance

Lifespan - >50,000 Hours (L90 B10)

Voltage - AC100~240V


Working Temperature - -20C° ~ +55C°

IP Rating - 67

IK - 10

Item Code	Power	Lamp	Lumen	Dimensions
LP-STR316060-H400	60W	LED	7200lm	A180 X B4000 X C180mm
LP-STR316080-H400	80W	LED	9600lm	A180 X B4000 X C180mm

Photometrics



Technical Drawing



OUTDOOR LIGHTS PALETTE

BOLLARD LIGHT

Kelvin

2700K - warm white, similar to incandescent bulb


3000K - soft white, similar to halogen bulb

4000K - bright white, similar to fluorescent lighting

5000K - daylight, very bright & similar to sunlight

6000K - cool white, blue tinted, like a monitor


Beam Angle



LED CHIP



LED DRIVER

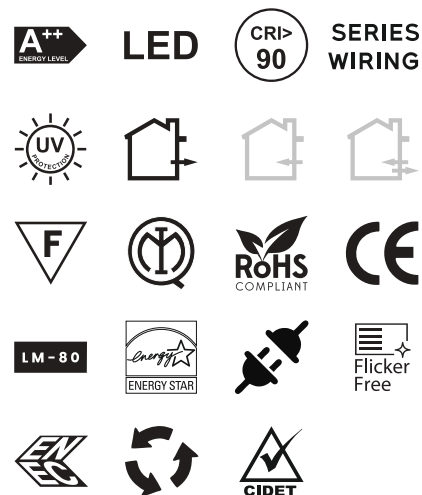

This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk