




Pop III Cylinder lamp adopts straight forward design with stylish appearance with high quality COB LED chip with high lumen and pure color. The AL6063 Aluminum radiator in sand blast oxidation treatment provides excellent heat dissipation and corrosion resistance. The built-in power supply with high conversion efficiency is stable and reliable. It is very suitable for star hotel, restaurant, shopping mall, villa, residence and other high-end projects.

Description


- Housing** - Die-cast Aluminum
- Diffuser** - Tempered Glass Diffuser
- Reflector** - Aluminium Reflector
- Color Available** - Black, White
- Lifespan** - >50,000 Hours (L90 B10)
- Voltage** - AC200~240V
- Working Temperature** - -20C° ~ +60C°
- IP Rating** - 44

Item Code	Power	Lamp	Lumen	Dimensions
LP-ODL232710	10W	LED	1200lm	A65 X B120mm
LP-ODL232715	15W	LED	1800lm	A90 X B140mm
LP-ODL232720	20W	LED	2400lm	A108 X B170mm

Photometrics



Technical Drawing



OUTDOOR LIGHTS POP III

CEILING SURFACE LIGHT

Kelvin

- 2700K - warm white, similar to incandescent bulb
- 3000K - soft white, similar to halogen bulb
- 4000K - bright white, similar to fluorescent lighting
- 5000K - daylight, very bright & similar to sunlight
- 6000K - cool white, blue tinted, like a monitor


Beam Angle



LED CHIP



LED DRIVER

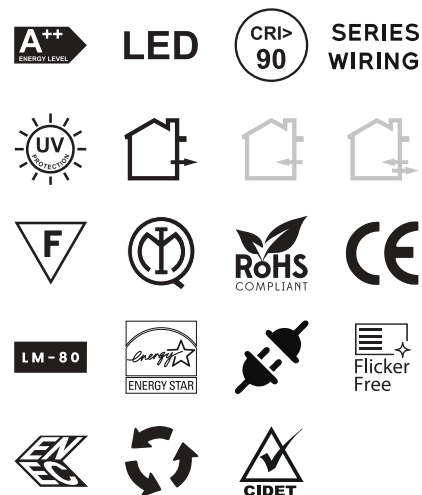

This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk