


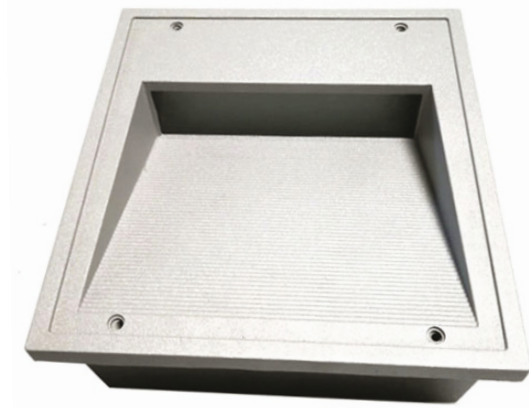


OUTDOOR LIGHTS ROCKY

WALL RECESSED LIGHT

Kelvin

- 2700K – warm white, similar to incandescent bulb
- 3000K – soft white, similar to halogen bulb
- 4000K – bright white, similar to fluorescent lighting
- 5000K – daylight, very bright & similar to sunlight
- 6000K – cool white, blue tinted, like a monitor

Beam Angle



Rocky Light with ideal size and design, this range is suitable for every pedestrian wall, parking ramp and more, it is high quality raw materials ensures high resistance to dust, extraneous corps in general, humidity and water. The LED system is highly efficient to provide excellent luminous flux results in low consumption. The item presents also features as easy installation and low maintenance requirements.

Description


- Housing** - Die-Casting Aluminum
- Diffuser** - 3mm Tempered Glass
- Reflector** - Aluminium Reflector
- Color Available** - Matt White, Matt Black & Matt Light Gray
- Lifespan** - >50,000 Hours (L90 B10)
- Voltage** - AC220~240V
- Working Temperature** - -20C° ~ +55C°
- IP Rating** - 65
- IK** - 08

Item Code	Power	Lamp	Lumen	Dimensions
LP-STL361006	06W	LED	600lm	A245 X B106 X C260mm
LP-STL361012	12W	LED	1200lm	A245 X B106 X C260mm
LP-STL361015	15W	LED	1500lm	A245 X B106 X C260mm


LED CHIP




LED DRIVER

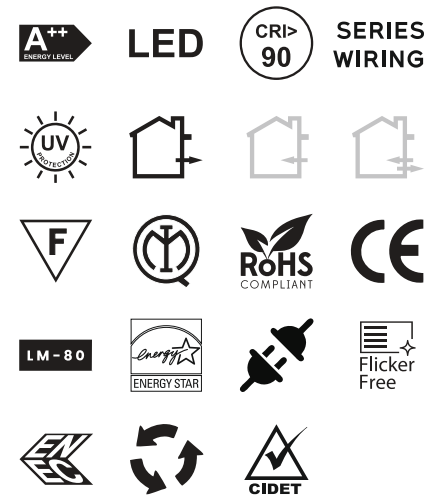

Photometrics



Technical Drawing



This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk