




OUTDOOR LIGHTS SHAPY

BOLLARD LIGHT

Kelvin

2700K – warm white, similar to incandescent bulb
 3000K – soft white, similar to halogen bulb
 4000K – bright white, similar to fluorescent lighting
 5000K – daylight, very bright & similar to sunlight
 6000K – cool white, blue tinted, like a monitor

Beam Angle



Shapy bollards with flat beam light distribution on one side. Luminaires which illuminate the ground surfaces directly in front of their installation site with a flat beam. Their light distribution allows the luminaires to be spaced far apart and is particularly suitable for illuminating footpaths and squares. We can supply these luminaires in two sizes and in different heights for the differing dimensions of the installation site.

LED CHIP




LED DRIVER




Description

- Housing** - Die Cast Aluminium with High Corrosion Resistance
Powder Coated and Stainless Steel Screws
- Diffuser** - High Purity Anodized Aluminium Reflector
- Reflector** - Aluminum Reflector
- Color Available** - White & Black
- Lifespan** - >50,000 Hours (L90 B10)
- Voltage** - AC100-240V
- IP Rating** - 66
- IK** - 08


Item Code	Power	Lamp	Lumen	Dimensions
LP-BL331507-H50	07W	LED	875lm	A160 X B160 X C500mm
LP-BL331514-H100	14W	LED	1750lm	A160 X B160 X C500mm

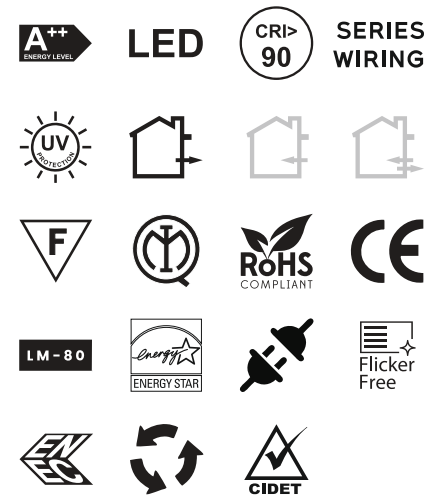

Photometrics



Technical Drawing



This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk