




Kelvin

- 2700K – warm white, similar to incandescent bulb
- 3000K – soft white, similar to halogen bulb
- 4000K – bright white, similar to fluorescent lighting
- 5000K – daylight, very bright & similar to sunlight
- 6000K – cool white, blue tinted, like a monitor

TRIO CCT – Three selectable color temperatures.

Beam Angle



This focused lighting solution is crafted from robust die-cast aluminum with a protective, high-quality finish, ensuring long term durability and resistance to typical indoor wear. Designed for recessed ceiling installation, it combines a sleek, discreet aesthetic with powerful, energy-efficient LED illumination, enhancing indoor spaces with both elegance and reliable performance.

LED CHIP



LED DRIVER



TRIDONIC

PHILIPS



Description

Housing - Die Cast Aluminum

Diffuser - Iron Frame

Reflector - Aluminum Reflector

Color Available - White, Black

Lifespan - >50,000 Hours (L80 B10)

Voltage - AC220~240V

Working Temperature - -20C° ~ +60C°

IP Rating - 20

Item Code	Power	Lamp	Lumen	Dimensions	Cut Out
LP-SL184309	09W	LED	675 lm	A85 X B82 mm	Ø75 mm



LED




SERIES
WIRING




This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!

Photometrics

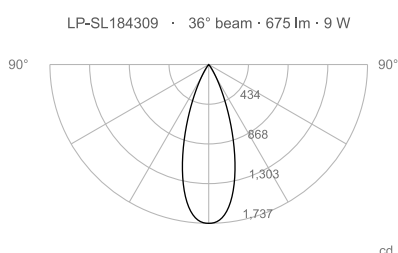

Technical Drawing



www.lightplus.uk