




This pendant offers another option for contemporary indoor lighting solutions. Indoor suspended linear fitting with integrated LED sources and direct light emission structure, with durable white, dark-gray powder coat finish, PMMA diffuser, offering a comfortable diffused light, High transmission opal diffuser, Suspension installation.

Description


- Housing** - Metal Powder Coated Finish
- Diffuser** - PMMA
- Reflector** - Aluminium Reflector
- Color Available** - White, Dark-Gray, Black
- Lifespan** - >50,000 Hours (L80 B10)
- Voltage** - AC200~240V
- Working Temperature** - -30C° ~ +65C°
- IP Rating** - 20
- IK** - 06

Item Code	Power	Lamp	Lumen	Dimensions
LP-PL247035	35W	LED	3300lm	A700 X B2045mm

Photometrics



Technical Drawing




INDOOR LIGHTS SPARCLE

PENDANT LIGHT

Kelvin

- 2700K - warm white, similar to incandescent bulb
- 3000K - soft white, similar to halogen bulb
- 4000K - bright white, similar to fluorescent lighting
- 5000K - daylight, very bright & similar to sunlight
- 6000K - cool white, blue tinted, like a monitor


Beam Angle



LED CHIP



LED DRIVER

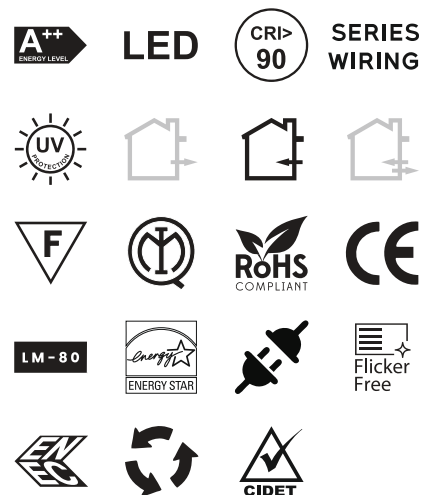

This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk