




INDOOR LIGHTS SPOTY III

DOWN LIGHT

Kelvin

- 2700K – warm white, similar to incandescent bulb
- 3000K – soft white, similar to halogen bulb
- 4000K – bright white, similar to fluorescent lighting
- 5000K – daylight, very bright & similar to sunlight
- 6000K – cool white, blue tinted, like a monitor

Beam Angle



Spoty III attractive down light for prestigious of offices, banks, hotels, restaurants, corridors, foyers, sales exhibition and conference rooms as well as residential areas. It is well integrated LED Chip and dimmable phase cut-o or DALI Driver.

LED CHIP



LED DRIVER



Description

Housing - Luminaire Body of die-cast Aluminum White, powder-coated. Luminaire body and Heat Sink form a Compact Unit

Diffuser - Clear Tempered Glass

Reflector - Aluminium Reflector

Color Available - White

Lifespan - >50,000 Hours (L80 B10)

Voltage - AC100~240V

Working Temperature - -35C° ~ +65C°


UGR - <19

IP Rating - 44


Item Code	Power	Lamp	Lumen	Dimensions
LP-DL2037320	3X20W	LED	7200lm	A400 X B140 X C55mm
LP-DL2037220	2X20W	LED	4800lm	A280 X B140 X C55mm
LP-DL2037120	1X20W	LED	2400lm	A140 X B140 X C55mm



Photometrics

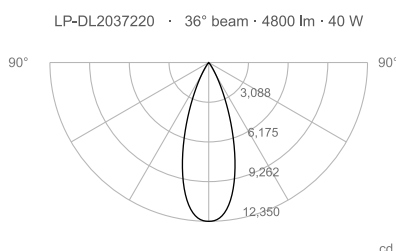

Technical Drawing

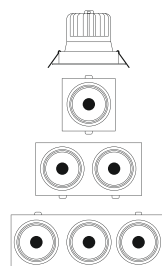

This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk