



OUTDOOR LIGHTS SQUAREL

WALL SURFACE LIGHT

Kelvin

2700K – warm white, similar to incandescent bulb
3000K – soft white, similar to halogen bulb
4000K – bright white, similar to fluorescent lighting
5000K – daylight, very bright & similar to sunlight
6000K – cool white, blue tinted, like a monitor

Beam Angle



Look lights, otherwise known as exterior building lights are special kinds of lights designed to be mounted on the outside part of commercial building walls. This Wall packs are designed with high intensity lamp heads that are energy efficient, durable and with low level of light pollution. Among the benefits of this light is its ability to illuminate specific areas outside the building.

LED CHIP




LED DRIVER




Description

Housing - Metal Powder Coated Finish
Diffuser - PMMA
Reflector - Aluminium Reflector
Color Available - Black and Dark Gray
Lifespan - >50,000 Hours (L80 B10)
Voltage - AC200-240V
Working Temperature - -30C° ~ +65C°
IP Rating - 65
IK - 08


Item Code	Power	Lamp	Lumen	Dimensions
LP-ODL374115	15W	LED	1800lm	145 X 115 X 145mm
LP-ODL374120	20W	LED	2400lm	145 X 115 X 145mm

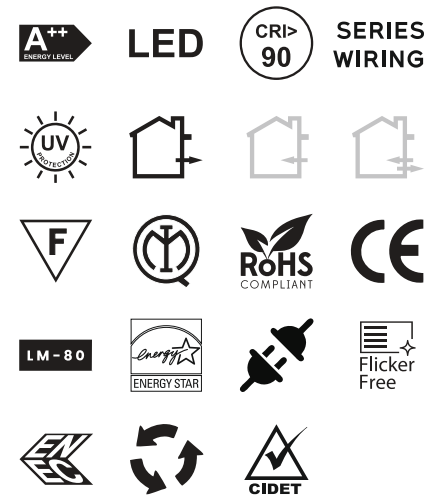

Photometrics

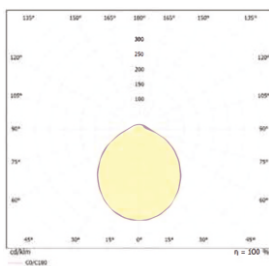

Technical Drawing

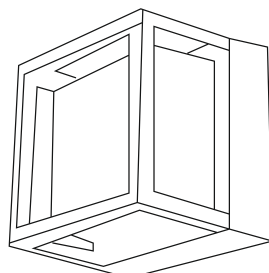

This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk