



OUTDOOR LIGHTS STAND

BOLLARD LIGHT

Kelvin

- 2700K – warm white, similar to incandescent bulb
- 3000K – soft white, similar to halogen bulb
- 4000K – bright white, similar to fluorescent lighting
- 5000K – daylight, very bright & similar to sunlight
- 6000K – cool white, blue tinted, like a monitor


Beam Angle



LED CHIP



LED DRIVER

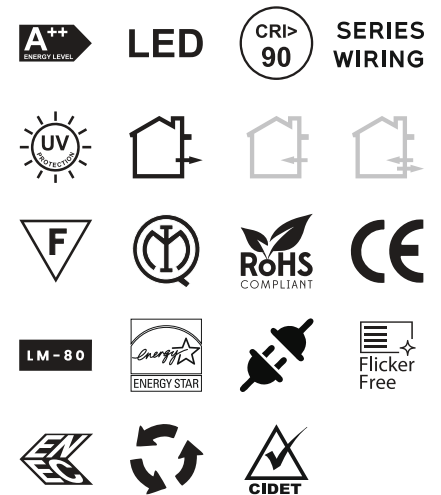

This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk




Double emission bollard & pole for outdoor application. Stand LED light source with a general lighting light distribution is composed of 2 arrayed LEDs, the source luminous flux is 2600lm, nominal luminous efficacy. The device body is made of die-cast aluminium en ab - 46100 and features a grey RAL 7021 finish, processed by means of open pore anodizing + powder coating, the diffuser is made of UV resistant polycarbonate with ingress protection degree is Ip66.

Description

- Housing** - Body is Die-casting Aluminum Cover, Extruded Aluminum Pole. Finishing Surface Anti-ageing Electrostatic Spray Processing.
- Diffuser** - PMMA
- Reflector** - Aluminum Reflector
- Color Available** - Gray / Dark Gray / Black RAL7021
- Lifespan** - >50,000 Hours (L90 B10)
- Voltage** - AC100~240V
- IP Rating** - 66

Item Code	Power	Lamp	Lumen	Dimensions
LP-BL331008-H40	08W	LED	1040lm	A400 X B97 X C155mm
LP-BL331020 -H80	20W	LED	2600lm	A800 X B97 X C155mm

Photometrics



Technical Drawing

