




OUTDOOR LIGHTS STRAIGHT

WALL RECESSED LIGHT

Kelvin

- 2700K – warm white, similar to incandescent bulb
- 3000K – soft white, similar to halogen bulb
- 4000K – bright white, similar to fluorescent lighting
- 5000K – daylight, very bright & similar to sunlight
- 6000K – cool white, blue tinted, like a monitor

Beam Angle



Straight LED Surface wall step light with easy installation, this light adopts die-cast aluminum body. This wall step ideal Applications that require continuous stairway, lobby, reception, corridors etc. light good to provide high bright lighting to stairway, lobby, reception, corridors, etc.

LED CHIP




LED DRIVER




Description

- Housing** - Die-Casting Aluminum
- Diffuser** - Clear Frosted Glass, Silicon Rubber Gasket
- Reflector** - Aluminium Reflector
- Color Available** - Black
- Lifespan** - >50,000 Hours (L90 B10)
- Voltage** - AC220~240V
- Working Temperature** - -20C° ~ +55C°
- IP Rating** - 65
- IK** - 08


Item Code	Power	Lamp	Lumen	Dimensions
LP-STL359012	12W	LED	1440lm	A300 X B55 X C80mm

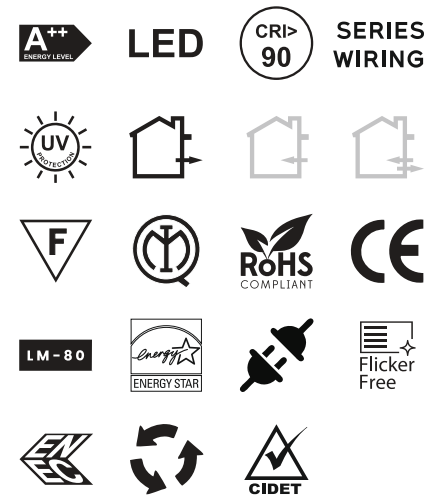

Photometrics



Technical Drawing



This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk