



Kelvin

2700K – warm white, similar to incandescent bulb

3000K – soft white, similar to halogen bulb

4000K – bright white, similar to fluorescent lighting

5000K – daylight, very bright & similar to sunlight

6000K – cool white, blue tinted, like a monitor

Beam Angle



LED CHIP



LED DRIVER



LED street luminaire optimized for low maintenance. The sealed light engine resists contamination, reducing lumen depreciation from dirt. Smart-ready sockets and drivers support future controls without redesign.

Description

Housing - Die Cast Aluminum

Diffuser - Opal PC

Color Available - Black & Grey

Lifespan - >50,000 Hours (L70 B10)

Voltage - AC220~240V

Working Temperature - -20° ~ +65°C

IP Rating - 65

IK - 10

Item Code	Power	Lamp	Lumen	Dimensions
LP-STR318430	30W	LED	2596lm	A480 X B480 X C320 mm
LP-STR318445	45W	LED	3370lm	A480 X B480 X C320 mm
LP-STR318460	60W	LED	4888lm	A480 X B480 X C320 mm
LP-STR318480	80W	LED	5044lm	A480 X B480 X C320 mm




This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk







Kelvin

- 2700K – warm white, similar to incandescent bulb
- 3000K – soft white, similar to halogen bulb
- 4000K – bright white, similar to fluorescent lighting
- 5000K – daylight, very bright & similar to sunlight
- 6000K – cool white, blue tinted, like a monitor


Technical Drawing

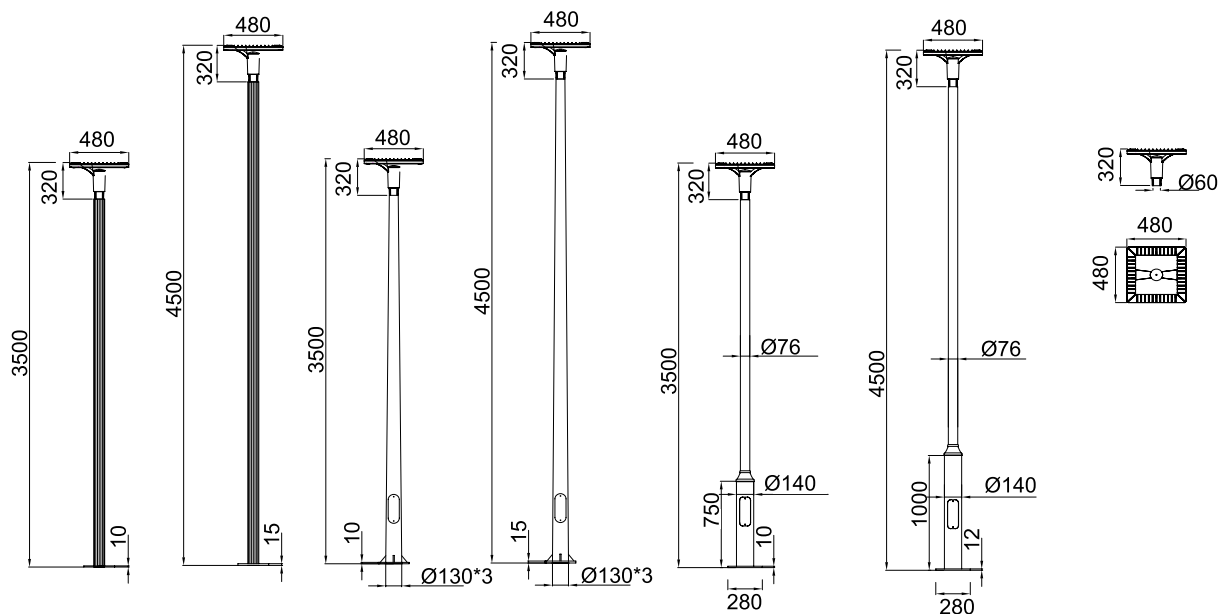


Photometrics

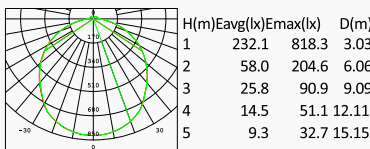


MTC 2835 LED 30W 2596lm
Opal PC
113°
Class I, IP65

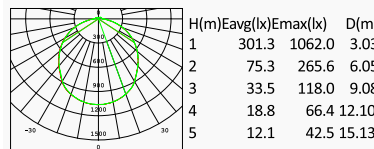

MTC 2835 LED 45W 3370lm
Opal PC
113°
Class I, IP65

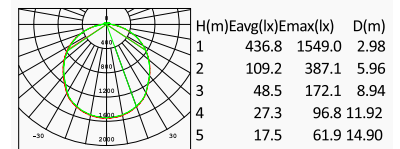

MTC 2835 LED 60W 4888lm
Opal PC
113°
Class I, IP65

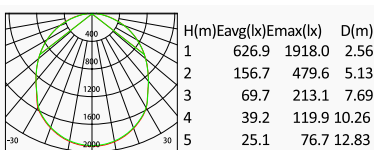

MTC 2835 LED 80W 5044lm
Opal PC
113°
Class I, IP65