




Shielded bollards with flat beam light distribution on one side. Luminaires which illuminate the ground surfaces directly in front of their installation site with a flat beam. Their light distribution allows the luminaires to be spaced far apart and is particularly suitable for illuminating footpaths and squares. We can supply these luminaires in two sizes and in different heights for the differing dimensions of the installation site.

Description


- Housing** - Die Cast Aluminium with High Corrosion Resistance Powder Coated and Stainless Steel Screws
- Diffuser** - Clear Pyrex Glass
- Reflector** - Aluminum Reflector
- Color Available** - White & Black
- Lifespan** - >100,000 Hours (L90 B50)
- Voltage** - AC100-240V
- Working Temperature** - -40°C ~ +55°C
- IP Rating** - 66
- IK** - 08

Item Code	Power	Lamp	Lumen	Dimensions
LP-BL351005	05W	LED	600lm	A90 X B128 X C700mm
LP-BL351010	10W	LED	1200lm	A90 X B128 X C700mm

Photometrics



Technical Drawing




OUTDOOR LIGHTS ZESTRUM

BOLLARD LIGHT

Kelvin

- 2700K - warm white, similar to incandescent bulb
- 3000K - soft white, similar to halogen bulb
- 4000K - bright white, similar to fluorescent lighting
- 5000K - daylight, very bright & similar to sunlight
- 6000K - cool white, blue tinted, like a monitor


Beam Angle



LED CHIP



LED DRIVER

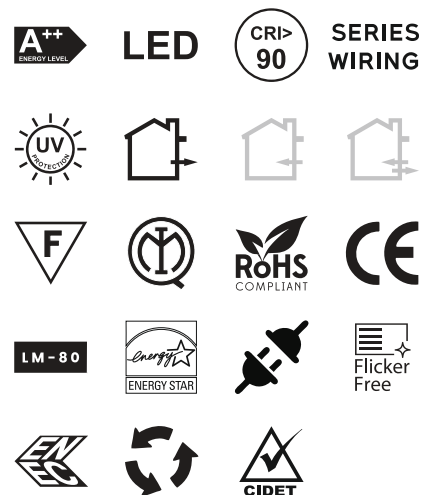

This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk